

FIREPRO

C/SfB

FS-TR8 DATASHEET – Nov 14

FIRE PROTECTIVE BUILDING PRODUCTS

FIREPRO CENTABUILD PTY LTD

128 Eldridge Rd Condell Park NSW 2200, AUSTRALIA

Ph: (02)9858 5597 & Ph: (02) 9804 0262 Fax: (02) 9858 5957


sales@firepro.com.au www.firepro.com.au

Product specifications can change. Contact us to ensure you have our latest datasheet

FS-TR8 DOOR THRESHOLD PLATE 8mm RAMP

DESCRIPTION

Robust, anodised clear aluminium floor ramp seal with 8mm rise.

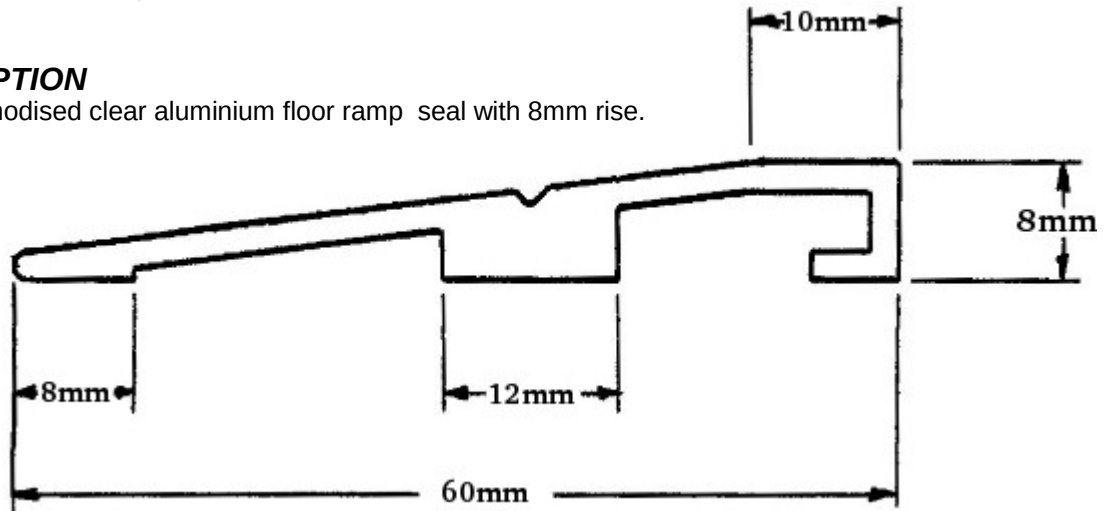

USES

Reduction in trip hazard around metal floor plates, internal floor mats, tiles, and other floor level changes.

Ramp for trollies etc (low gradient – 1:13)



Enhanced door bottom weather & smoke sealing when used in conjunction with door bottom seals, whether used singly or as 2 seals with 8mm edges adjoining.

FEATURES

Location line for screw fixing

May be screw fixed or Builder's Adhesive

Solid area in seal allows screws to be counter sunk

Standard lengths 1000mm, 2500mm, 5000mm

Product codes:

FS-TR8 -1 (1000mm)

FS-TR8-2.5 (2500mm)

FS-TR8-5 (5000mm)

NOTE: The technical information and suggestions for use and application presented herein represent the best information available to us and are believed to be reliable. If used beyond the situations detailed on this datasheet we advise confirming their suitability before installation. All dimensions are nominal.

We reserve the right to make changes or to withdraw designs and products without notice.