FIREPRO

FIRE PROTECTIVE BUILDING PRODUCTS

FIREPRO CENTABUILD PTY LTD

128 Eldridge Rd Condell Park NSW 2200, AUSTRALIA
Ph: (02)9858 5597 & Ph: (02) 9804 0262 Fax: (02) 9858 5957

sales@firepro.com.au www.firepro.com.au

CI/SfB
B400 ACOUSTIC DATASHEET – Mar 14

Product specifications can change. Contact us to ensure you have our latest datasheet

FIREPRO B400 SPIRALITE

Fire Protective Acoustic Insulating Board

FIREPRO SPIRALITE is a resin bonded mineral fibre board designed primarily for use as fire protection for strucural steelwork. It does however exhibit other properties such as excellent sound absorption.

Typical sound absorption coefficient figures for 40mm and 50mm thicknesses are given below. Spiralite is stocked by Firepro Centabuild Ltd in 20mm, 30mm and 40mm thick sheets.

40MM Spiralite

Mean Frequency (Hz)	125	250	500	1000	2000	4000
Absorption Coefficient	0.15	0.65	0.89	10.7	1.08	1.15

50MM Spiralite

Mean Frequency (Hz)	125	250	500	1000	2000	4000	
Absorption Coefficient	0.18	0.75	0.93	1.09	1.15	1.18	

Graph 1 - Spiralite Sound Reduction

Where anticipated noise levels are above the requirement, Spiralite can be used to reduce noise to an acceptable level. Typical values are given in table 1. The sound reduction index is given in table 2 and shown in graph 1.

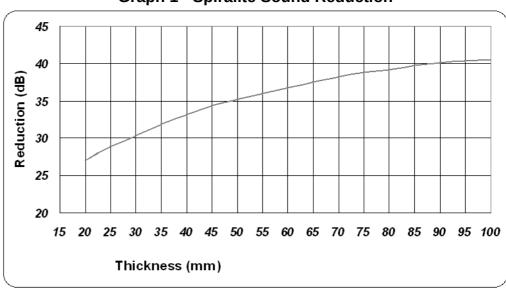


Table 1 - Typical Sound Reduction Figures

Thickness	125Hz	250Hz	500Hz	1000Hz	2000Hz	4000Hz
20mm	12.0	18.0	24.0	30.0	36.1	42.1
30mm	15.5	21.5	27.5	33.6	39.6	45.6
40mm	18.0	24.0	30.0	36.1	42.1	48.1
50mm	19.9	26.0	32.0	38.0	44.0	50.0

Table 2 - Sound Reduction Index

Thickness	Index (dB)		
20mm	27		
30mm	36.6		
40mm	33.1		
50mm	35		

NOTE: The technical information and suggestions for use and application presented herein represent the best information available to us and are believed to be reliable. If used beyond the situations detailed on this datasheet we advise confirming their suitability before installation. All dimensions are nominal.