

FIREPRO

C/SfB

B400 DUCTING DATASHEET – Nov 14

FIRE PROTECTIVE BUILDING PRODUCTS

FIREPRO CENTABUILD PTY LTD

128 Eldridge Rd Condell Park NSW 2200, AUSTRALIA

Ph: (02)9858 5597 & Ph: (02) 9804 0262 Fax: (02) 9858 5957

sales@firepro.com.au www.firepro.com.au


Product specifications can change. Contact us to ensure you have our latest datasheet

FIREPRO B400 SPIRALITE Insulated Fire Protection for Ducting

FIREPRO SPIRALITE provides a fully insulated duct.

Lightweight board, adding minimal weight to ducting and hangers.

Easy to cut and fix on site.

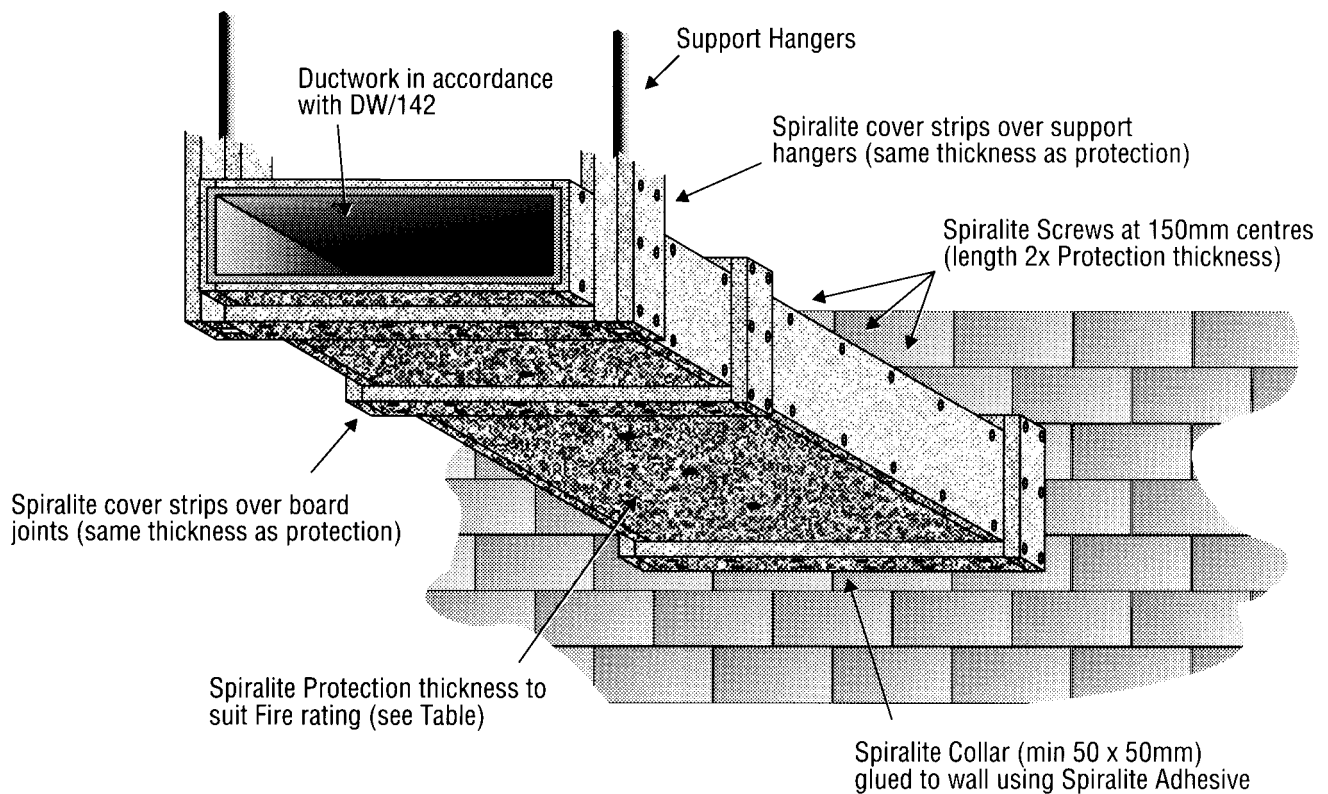

NOTE: 3mm stud welded pins to be fixed on soffit of ducting, 300mm from each edge and at 600mm centres. 38mm diameter non-return washers to be used to secure cladding on pins. Pins to be bent through 90°.

FIRE TESTING

Fire Tested and Assessed to BS476 Part 24 1987 by The Loss Prevention Council (LPC) UK.

Assessment Reports

CC84917/RHE,

CC84917A/RHE,

CC85666/RHE.

Board Thicknesses Required.		
Fire Rating (min)	Fire on the:	
	Outside (mm)	Inside (mm)
30	25	40
60	30	65
90	35	

NOTE: The technical information and suggestions for use and application presented herein represent the best information available to us and are believed to be reliable. If used beyond the situations detailed on this datasheet we advise confirming their suitability before installation. All dimensions are nominal.

We reserve the right to make changes or to withdraw designs and products without notice.